

TiX560 and TiX520 Thermal Imagers

The Fluke Expert Series

Technical Data



PREMIUM IMAGE QUALITY

SPATIAL RESOLUTION

TiX560 and TiX520

1.31 mRad

RESOLUTION

TiX560 and TiX520

320 x 240 (76,800 pixels) and 640x480 (307,200 pixels) with SuperResolution Mode

FILTER MODE (NETD IMPROVEMENT)

TiX560

≤ 0.03 °C at 30 °C target temp (30 mK)

TiX520

≤ 0.04 °C at 30 °C target temp (40 mK)

TEMPERATURE RANGE

TiX560

-20 °C to +1200 °C (-4 °F to +2192 °F)

TiX520

-20 °C to +850 °C (-4 °F to +1562 °F)

IMAGE SHARPENING

TiX560

Image sharpening improves image clarity and quality

Your view of infrared technology is about to change 180°

- Easily navigate over, under and around objects with the **180° articulating lens** and see the image before you capture it
- Premium in-field viewing experience with the **only 5.7 inch responsive touchscreen LCD in its class¹**—150% more viewing area²
- **Enhanced image quality and temperature measurement accuracy** – turn your 320 x 240 images into 640 x 480 images, that's 4x's the resolution and pixels with SuperResolution
- **Get an in-focus image with the touch of a button.** **LaserSharp® Auto Focus**, exclusive to Fluke, uses a built-in laser distance meter that calculates and displays the distance to your designated target with pinpoint accuracy³
- See the details you need with **smart lenses**—2x and 4x telephoto, wide angle, and 25 micron macro—no calibration required, interchangeable between compatible thermal imagers


¹Compared to industrial handheld thermal imagers with 320x240 detector resolution as of October 14, 2014.

²Compared to a 3.5 inch screen.

³Up to 30 meters (100 feet).



Get tough shots from any angle with a 180° degree rotating lens and the only 5.7 inch LCD.

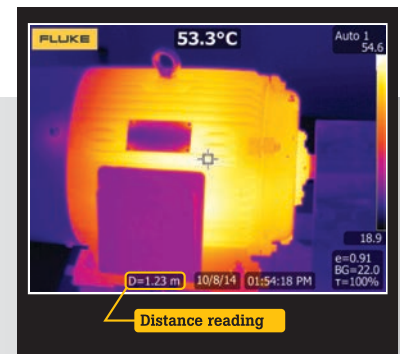

LaserSharp® Auto Focus uses a built in laser distance meter that calculates and displays the distance to your designated target with pinpoint accuracy.

Detailed specifications

| | TiX560 | TiX520 |
|--|---|--|
| Key Features | | |
| IFOV with standard lens (spatial resolution) | 1.31 mRad, D:S 764:1 | |
| Detector resolution | 320 x 240 (76,800 pixels) | |
| Field of view | 24 °H x 17 °V | |
| Minimum focus distance | 15 cm (approx. 6 in) | |
| IFOV with optional 2x telephoto smart lens | 0.65 mRad, D:S 1528:1 | |
| Field of view | 12 °H x 9 °V | |
| Minimum focus distance | 45 cm (approx. 18 in) | |
| IFOV with optional 4x telephoto smart lens | 0.33 mRad, D:S 3056:1 | |
| Field of view | 6.0 °H x 4.5 °V | |
| Minimum focus distance | 1.5 m (approx. 5 ft) | |
| IFOV with optional wide-angle smart lens | 2.62 mRad, D:S 399:1 | |
| Field of view | 46 °H x 34 °V | |
| Minimum focus distance | 15 cm (approx. 6 in) | |
| Minimum micron spot size with optional macro smart lens | 25 microns | |
| Field of view | 36.1° X 27.1° | |
| Working distance | ~8 mm (0.3 in) to ~14 mm (0.6 in) with optimal at 10 mm (0.4 in) | |
| SuperResolution | On camera and in software | In software |
| Image sharpening | Yes | — |
| LaserSharp® Auto Focus | Yes, for consistently in-focus images. Every. Single. Time. | |
| Laser distance meter | Yes, calculates distance to the target for precisely focused images and displays distance on screen | |
| Advanced manual focus | Yes | |
| Streaming video (remote display) | Via HDMI or WiFi hot spot in remote control mode | Via HDMI |
| Touchscreen display (capacitive) | 14.4 cm (5.7 in) diagonal landscape color VGA (640 x 480) LCD with backlight | |
| Wireless connectivity | | |
| CNX™ Wireless System | Yes (where available) | |
| IR-Fusion® technology | Yes | |
| AutoBlend™ mode | Yes | |
| Picture-In-Picture (PIP) | Yes | |
| Continuous AutoBlend™ | Set AutoBlend™ level across continuum | — |
| Rugged, ergonomic design | Rotatable (articulating lens) >180 degrees | |
| Thermal sensitivity (NETD) | ≤ 0.045 °C at 30 °C target temp (45 mK) | ≤ 0.05 °C at 30 °C target temp (50 mK) |
| Filter Mode (NETD improvement) | ≤ 0.03 °C at 30 °C target temp (30 mK) | ≤ 0.04 °C at 30 °C target temp (40 mK) |
| Level and span | Smooth auto and manual scaling | |
| Touchscreen adjustable level/span | Yes. Span and level can be easy and quickly set by simply touching the screen | |
| Fast auto toggle between manual and auto modes | Yes | |
| Fast auto-rescale in manual mode | Yes | |
| Minimum span (in manual mode) | 2.0 °C (3.6 °F) | |
| Minimum span (in auto mode) | 3.0 °C (5.4 °F) | |
| Built-in digital camera (visible light) | 5 megapixel industrial performance | |
| Frame rate | 60 Hz or 9 Hz versions | |
| Laser pointer | Yes | |
| LED light (torch) | Yes | |
| Digital Zoom | 2x, 4x, 8x | 2x, 4x |

| | TiX560 | TiX520 |
|---|---|---------------------------------------|
| Data storage and image capture | | |
| Extensive memory options | Removable micro SD memory card, on-board flash memory, save-to-USB flash drive capability, direct download via USB-to-PC connection | |
| Image capture, review, save mechanism | One-handed image capture, review, and save capability | |
| Post-capture image editing (on camera) | Yes. Conduct on camera analysis for in-field results | |
| Advanced text Annotation | Yes. Including standard shortcuts as well as user programmable options | |
| File formats | Non-radiometric (.bmp) or (.jpeg) or fully radiometric (.is2); no analysis software required for non-radiometric (.bmp, .jpg and .avi) files | |
| Memory review | Thumbnail view navigation and review selection | |
| Software | SmartView® software and SmartView® Mobile App—full analysis and reporting software | |
| Export file formats with SmartView® software | BMP, DIB, GIF, JPE, JFIF, JPEG, JPG, PNG, TIF, and TIFF | |
| Voice annotation | 60 seconds maximum recording time per image; reviewable playback on camera | |
| IR-PhotoNotes™ | Yes | |
| Text annotation | Yes | |
| Video recording | Standard and radiometric | |
| File formats video | Non-radiometric (MPEG - encoded .AVI) and fully radiometric (.IS3) | |
| Remote control operation | Yes | — |
| Auto capture (temperature and interval) | Yes | |
| Battery | | |
| Batteries (field-replaceable, rechargeable) | Two lithium ion smart battery packs with five-segment LED display to show charge level | |
| Battery life | Three hours continuous use per battery pack | |
| Battery charge time | 2.5 hours to full charge | |
| Battery charging system | Two-bay battery charger or in-imager charging. Optional 12 V automotive charging adapter | |
| AC operation | AC operation with included power supply (100 V AC to 240 V AC, 50/60 Hz) | |
| Power saving | User selectable sleep and power off modes | |
| Temperature measurement | | |
| Temperature measurement range (not calibrated below -10 °C) | -20 °C to +1200 °C (-4 °F to +2192 °F) | -20 °C to +850 °C (-4 °F to +1562 °F) |
| Accuracy | ± 2 °C or 2 % (at 25 °C nominal, whichever is greater) | |
| On-screen emissivity correction | Yes (both value and table) | |
| On-screen reflected background temperature compensation | Yes | |
| On-screen transmission correction | Yes | |
| Color palettes | | |
| Standard palettes | 8: Ironbow, Blue-Red, High Contrast, Amber, Amber Inverted, Hot Metal, Grayscale, Grayscale Inverted | |
| Ultra Contrast™ palettes (8) | Ironbow Ultra, Blue-Red Ultra, High Contrast Ultra, Amber Ultra, Amber Inverted Ultra, Hot Metal Ultra, Grayscale Ultra, Grayscale Inverted Ultra | |
| General specifications | | |
| Color alarms (temperature alarms) | High-temperature and low-temperature | |
| Infrared spectral band | 7.5 µm to 14 µm (long wave) | |
| Temperature | Operating: -10 °C to +50 °C (14 °F to 122 °F); Storage: -20 °C to +50 °C (-4 °F to 122 °F) without batteries | |
| Relative humidity | 10 % to 95 % non-condensing | |
| Center-point temperature measurement | Yes | |
| Spot temperature | Hot and cold spot markers | |
| User-definable spot markers | 3 user-definable spot markers | |
| Center box | Expandable—contractible measurement box with MIN-MAX-AVG temp | |
| Safety | IEC 61010-1: Overvoltage Category II, Pollution degree 2 | |
| Electromagnetic compatibility | IEC 61326-1: Basic EM Environment; CISPR11, Group 1, Class A | |
| Australian RCM | IE 61326-1 | |
| US FCC | CFR 47, Part 15 Subpart B | |
| Vibration | 0.03 g2/Hz (3.8 grms), 2.5g IEC 68-2-6 | |
| Shock/Drop | 25 g, IEC 68-2-29/Engineered to withstand 1 meter (3.3 feet) drop with standard lens | |
| Size (H x W x L)/Weight (battery included) | 27.3 cm x 15.9 cm x 9.7 cm (10.8 in x 6.3 in x 3.8 in)/1.54 kg (3.4 lb) | |
| Enclosure rating | IEC 60529: IP54 (protected against dust, limited ingress; protection against water spray from all directions) | |
| Warranty/Calibration cycle | Two-years (standard), extended warranties are available/Two-years (assumes normal operation and normal aging) | |
| Supported languages | Czech, Dutch, English, Finnish, French, German, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Simplified Chinese, Spanish, Swedish, Traditional Chinese, and Turkish | |

Ordering information

FLK-TiX560 60Hz Thermal Imager; 320x240; 60 Hz

FLK-TiX560 9Hz Thermal Imager; 320x240; 9 Hz

FLK-TiX520 60Hz Thermal Imager; 320x240; 60 Hz

FLK-TiX520 9Hz Thermal Imager; 320x240; 9 Hz

Included with product

Thermal imager with standard infrared lens; ac power supply and battery pack charger (including universal ac adapters); two, rugged lithium ion smart battery packs; USB cable; HDMI video cable; rugged, hard carrying case, adjustable neck and hand strap, bluetooth headset (where available), warranty registration card and calibration certificate. Flash drive includes product manuals in English, Chinese, German, Portuguese, Spanish, French, Italian, Korean, and Japanese, Russian and Turkish and SmartView® software. (Software is also available via download at www.fluke.com/smartviewdownload).

Optional accessories

FLK-LENS/TELE2 Infrared Telephoto Lens

(2X magnification)

FLK-LENS/4XTELE2 Infrared Telephoto Lens

(4X magnification)

FLK-LENS/WIDE2 Infrared Wide Angle Lens

FLK-LENS/25MAC2 25 Micron Macro Infrared Lens

TI-CAR-CHARGER Car Charger

BOOK-ITP Introduction to Thermography Principles Book

FLK-TI-SBP4 Additional Smart Battery

FLK-TI-SBC3 Additional Smart Battery Charger

FLK-TiX5X-LENS CAP Infrared Lens Cover

FLK-TiX5XX-NECK Neck strap

FLUKE-TiX5XX HAND Hand strap

FLK-TI-BLUETOOTH Bluetooth Headset

FLK-TiX5XX-HDMI HDMI Cable

